

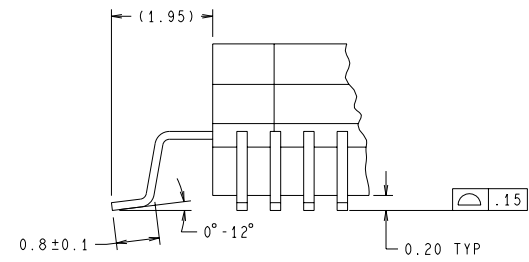


| REVISIONS | | | | |
|-----------|------------------------------|--------|----------|----------|
| LTR | DESCRIPTION | E.C.N. | DATE | BY/APP'D |
| A | RELEASE TO DOCUMENT CONTROL. | 10130 | 09/22/94 | DEG/ |

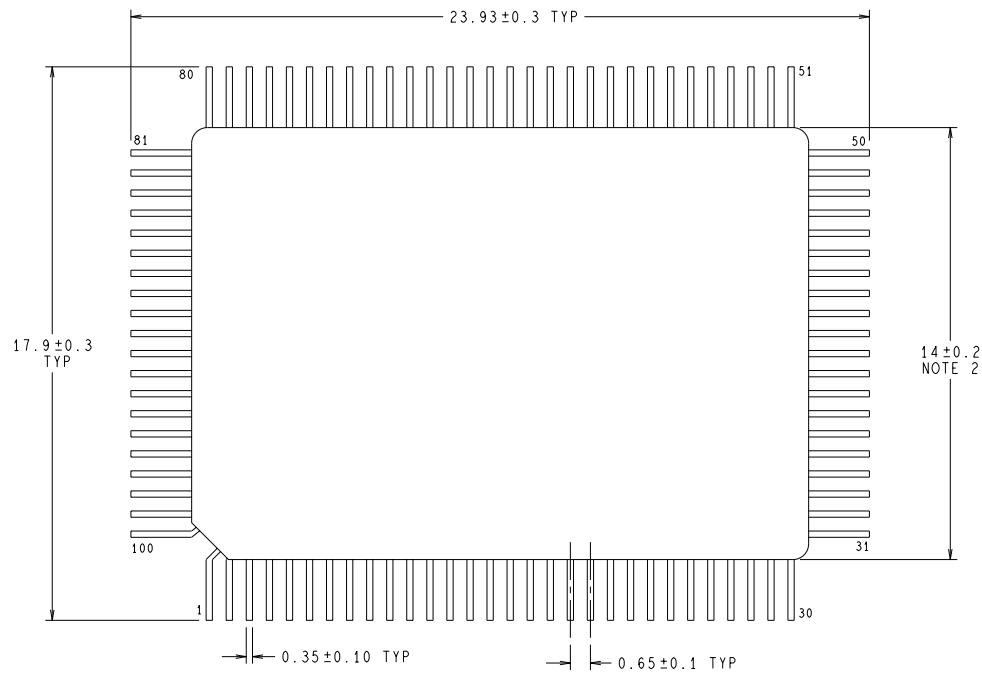

DETAIL A
SCALE: 15X

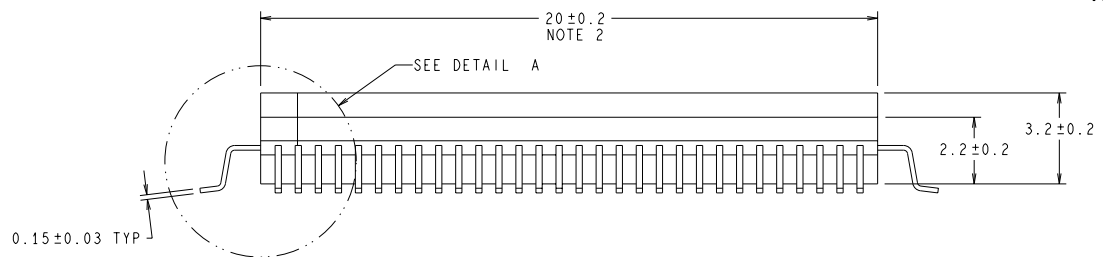

NOTES: UNLESS OTHERWISE SPECIFIED.

- STANDARD LEAD FINISH:
1.52 MICROMETERS MINIMUM GOLD THICKNESS ON ALLOY 42.
- FOR PROTOTYPE ENGINEERING USE ONLY.

| | | | | | |
|-----------------------------|----------|--|-----------|-------------------------------|----------|
| APPROVALS | DATE | NATIONAL SEMICONDUCTOR CORPORATION | | | |
| DRAWN <i>D. E. Grady</i> | 09/22/94 | 2900 Semiconductor Drive, Santa Clara, CA 95052-8090 | | | |
| DFTG. CHK. | | CERQUAD, 14 X 20 X 3.2mm, 100 LEAD | | | |
| ENGR. CHK. | | | | | |
| APPROVAL | | | | | |
| | | SCALE N/A | SIZE C | DRAWING NUMBER MKT-WLK100A | REV A |
| | | DO NOT SCALE DRAWING | | SHEET 1 of 1 | |